




## Iron Y Strainer Cast Steel Y Strainer

Teleflo Strainers and Pressure Vessels

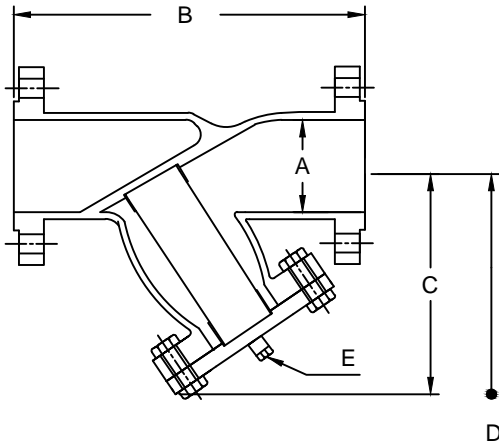

### Features:

- Sizes from 15nb to 300nb.
- End Connections are as per ANSI B16.5 125lbs SORF.
- Free straining area of 4 times pipe cross section area is standard.
- Covers with Drain and Drain plug are Standard.
- Mechanical guide on body and cover standard.
- Differential tappings on request.
- Quick Closing Cover can be supplied on request.

Dimensional Data												
Size	A		B		C		D		E (NTP)		Weight	
	Class 150	Class 300	Class 150	Class 300	Class 150	Class 300	Class 150	Class 300	Class 150	Class 300	Class 150	Class 300
nb	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
15	13	13	152	165	99	108	121	146	8	8	2.5	3.6
20	19	19	178	197	108	127	146	171	10	10	3	6.4
25	25	25	191	200	121	140	162	206	15	15	4	6.8
40	38	38	229	267	143	178	229	260	15	15	5.5	15
50	51	51	219	229	133	145	191	203	15	15	9	12
65	64	64	260	276	183	191	267	260	20	25	14.5	76
80	76	76	295	320	195	207	276	292	25	25	16	25
100	102	102	365	372	232	245	330	346	40	40	28	40
125	127	127	448	470	279	391	432	546	50	50	50	82
150	152	152	473	502	330	381	467	546	50	50	73	91
200	203	203	619	635	389	419	549	559	50	50	95	132
250	254	254	660	705	486	538	686	762	50	50	200	236
300	305	305	772	838	559	617	787	873	50	50	265	308

Dimensions are subjected to change.  
Ask for certified drawing while ordering.

### Note:

1. Socket welded strainers can be supplied on request.
2. CF8, CF8M Strainers can be supplied with buffed finish.
3. Enamel paint on red oxide primer standard.
4. Epoxy coating can be done on request.

### Screen

- 50-200nb - 3.2mm hole diameter X 0.75 mm thick.
- 250 - 300nb - 3.2mm hole diameter X 1.5 mm thick.
- 350-400nb - 4.8mm hole diameter X 3.0 mm thick.
- Other screens and linings on request.

Tel : +91-44-42125518  
Help line : +91-9884063432

Fax: +91-44-42669305

www.teleflo.co.in  
www.teleflostrainers.com

E-mail: sales@teleflo.co.in